



CHARGING STATIONS

MAIN FEATURES:

- Power range: up to 50 kW
- Safe when disconnected (no voltage on the connector side)
- 1 connector (SAE-J1772) 80A 1 phases 240V
1 connector (Mennekes Type 2) 63A 3 phases 420V
1 connector (CCS) 125A 3 phases 450V
1connector (Chademo) 125A 3 phases 450V
(optional) +1 connector (CCS)
- On-line electricity consumption and charging time measurement
- Floor mounting
- Operating temperature range: -50 °C to +50 °C
- Two-line backlit LED
- Support managem ent via the app
- Over-the-Air firmware update
- Ingress Protection Rating: IP65\IK10
- Equipped with a 30mA 3-phase tripping device
- Warranty period: 24 months

Optional


Lightweight aluminium case

Optional

57" LED ads front display


**Optional**

7" LCD screen

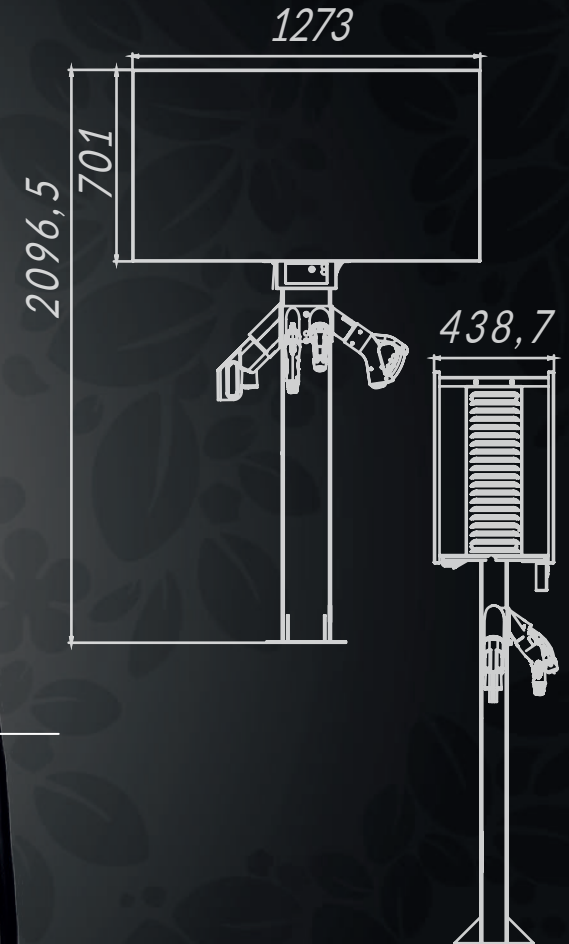DIMENSIONS:**+442033934113****+442033934113**office@autoenterprise.co.uk
autoenterprise.co.uk

MAIN FEATURES:

- Power range: up to 60 kW
- Safe when disconnected
(no voltage on the connector side)
- 1 connector (SAE-J1772) 80A 1 phases 240V
1 connector (Mennekes Type 2) 63A 3 phases 420V
1 connector (CCS T2) 150A 3 phases 550V
1 connector (Chademo) 150A 3 phases 550V
(optional) power distribution unit
- On-line electricity consumption and charging time measurement
- Wall mounting
- **(optional stand)** floor mounting
- Operating temperature range: -50 °C to +50 °C
- Two-line backlit LED
- Support management via the app
- Over-the-Air firmware update
- Ingress Protection Rating: IP65\IK10
- Equipped with a 30mA 3-phase tripping device
- Warranty period: 24 months

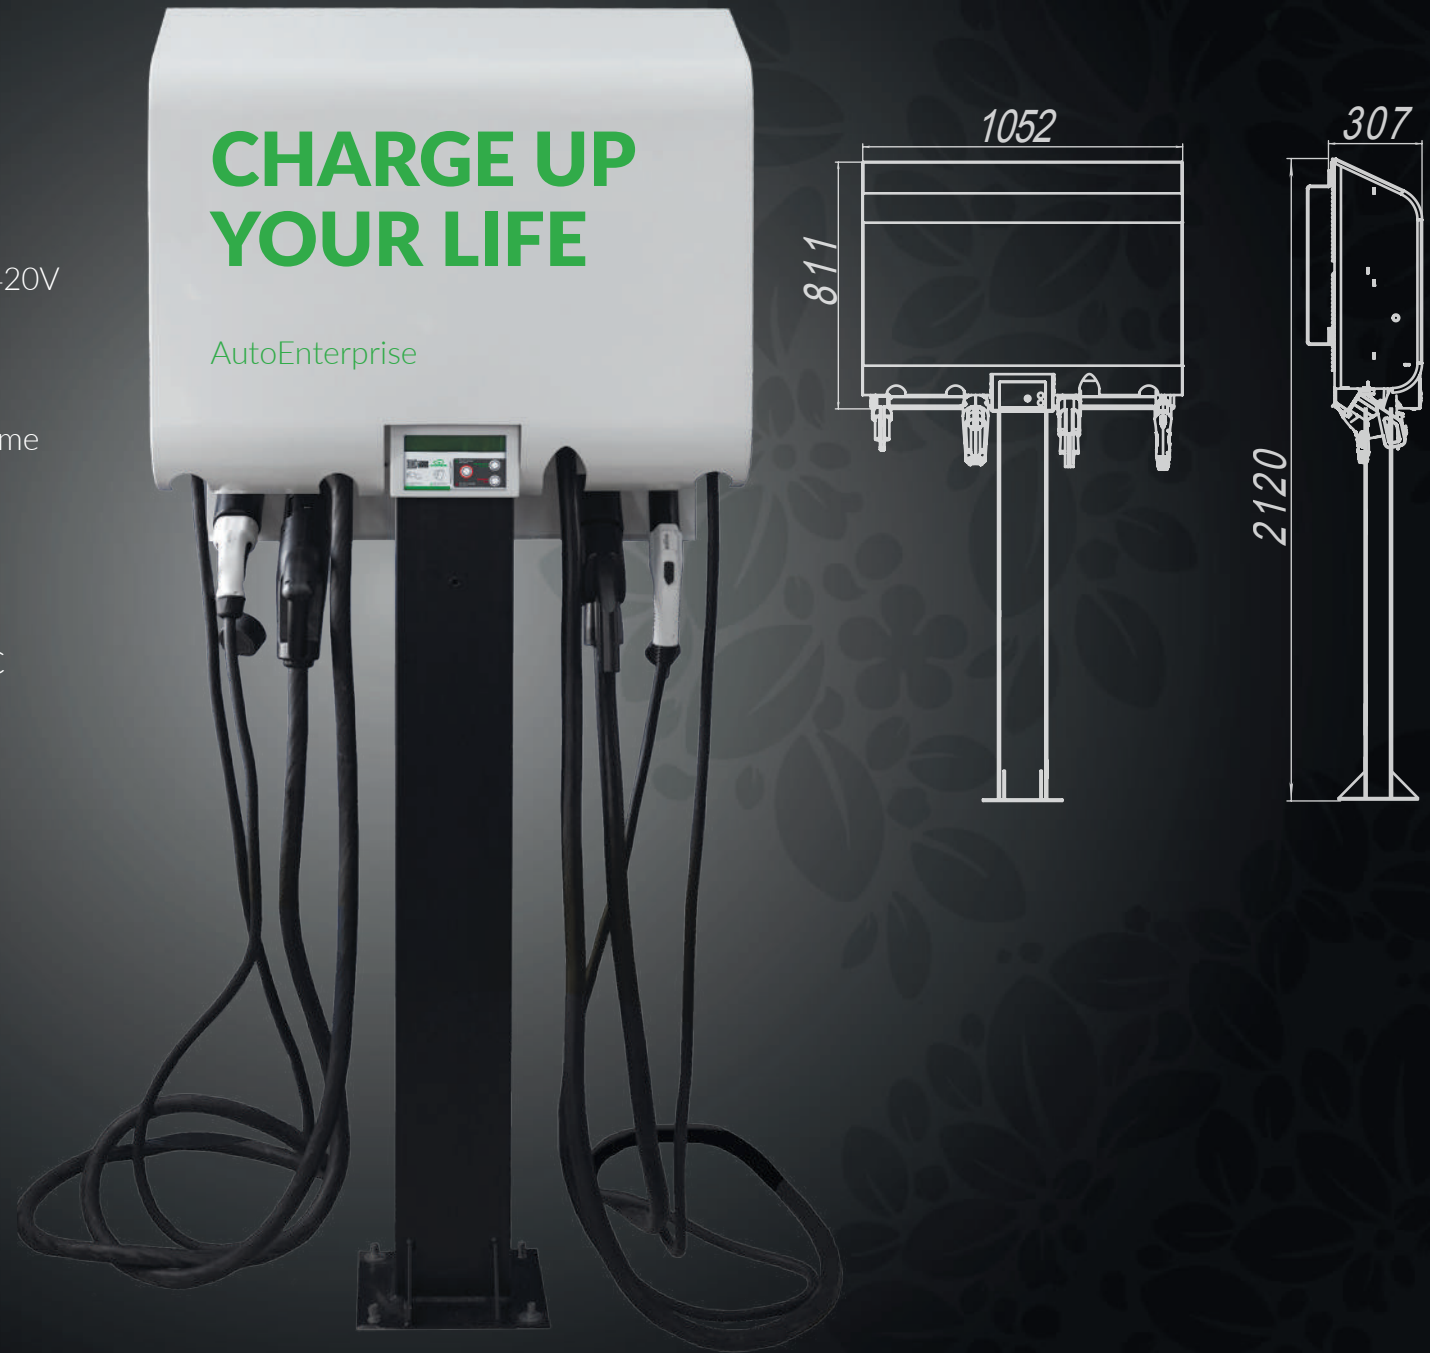
DIMENSIONS:**+442033934113****+442033934113****office@autoenterprise.co.uk**
autoenterprise.co.uk

MAIN FEATURES:

- Power range: up to 44kW
- Safe when disconnected (no voltage on the connector side)
- Supply voltage: 220/240V, at all Type 2 sockets – 380 V
- Cable length: from 4 m
- Sockets standards: Type1 (SAE-J1772) or Type2 (Mennekes)
- On-line electricity consumption and charging time measurement
- Current limit: 5-80A
- Operating temperature range: -50 °C to +50 °C
- Ingress Protection Rating: IP65\IK10
- Indoor/outdoor installation
- Support management via the app
- Over-the-Air firmware update
- Warranty period: 24 months



DIMENSIONS:

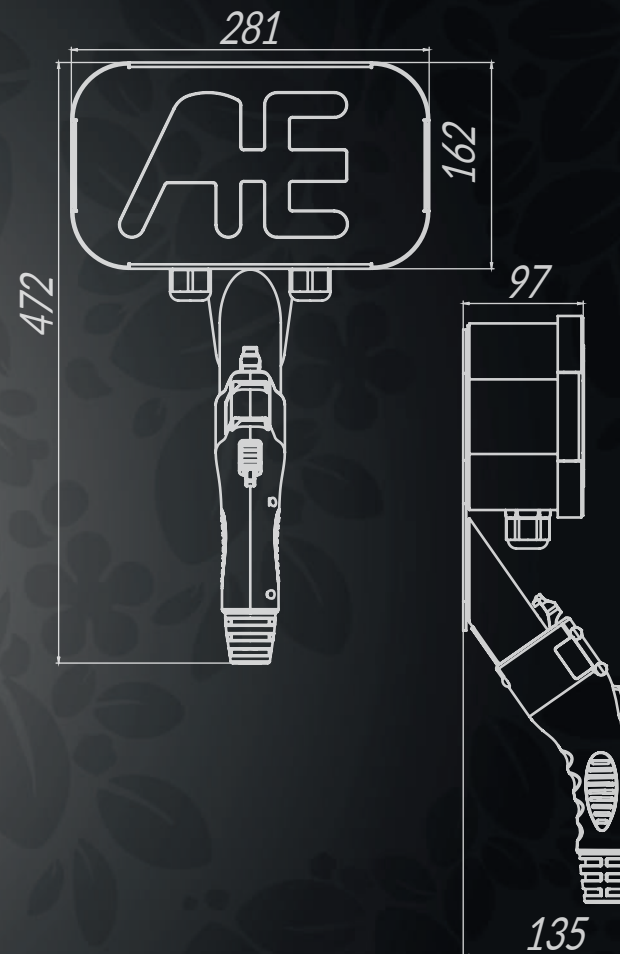

+442033934113


+442033934113

office@autoenterprise.co.uk
autoenterprise.co.uk

MAIN FEATURES:

- Power range: up to 44kW
- Safe when disconnected
(no voltage on the connector side)
- 1 connector (SAE-J1772) 80A 1 phases 240V
1 connector (Mennekes Type 2) 63A 3 phases 420V
- Cable length: 6,5 m
- On-line electricity consumption and charging time measurement
- Indoor/outdoor installation
- Operating temperature range: -50 °C to +50 °C
- Support management via the app
- Over-the-Air firmware update
- Ingress Protection Rating: IP65\IK10
- Warranty period: 24 months

DIMENSIONS:

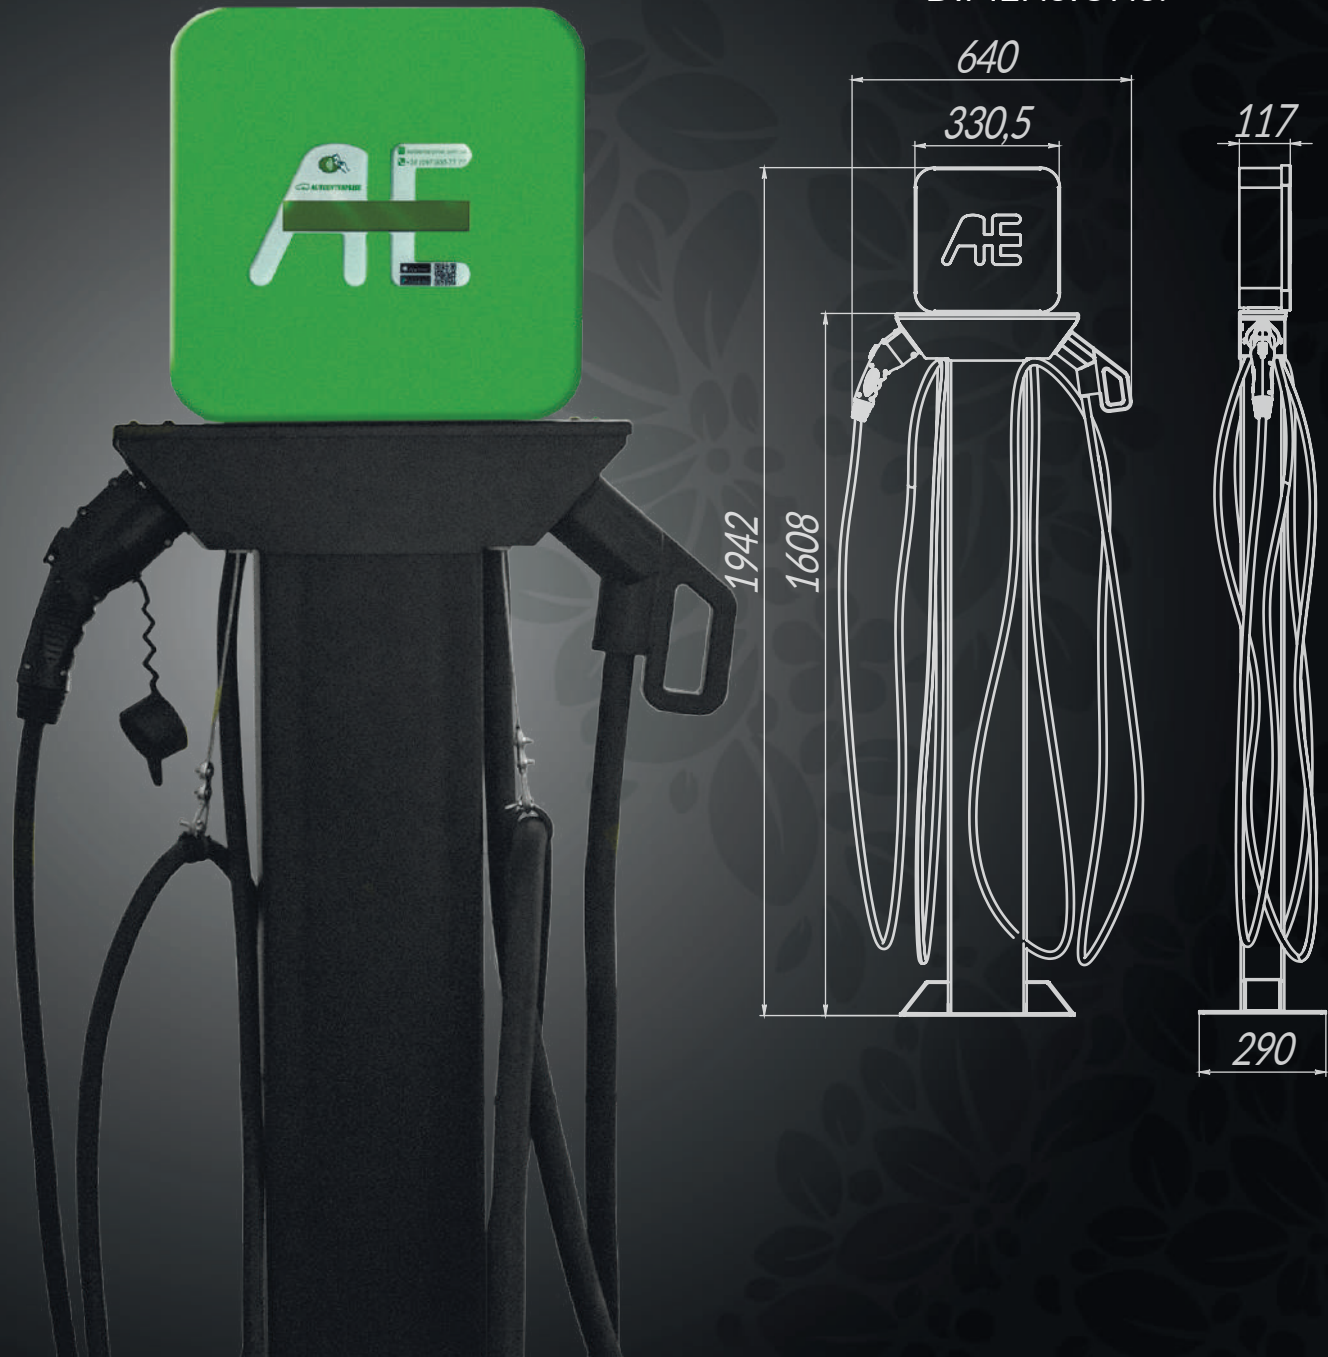

+442033934113

+442033934113

office@autoenterprise.co.uk
autoenterprise.co.uk